

EUSSONET
Set.Detect.Protect

Security Products Catalogue





Cameras

Surveillance
Systems
& Accessories

02

Item	Picture	TVL	Lens	Lens Brand	IR	Outdoor	Lux	Power	Intelligence video
EN SW32RT60		600	6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	ICR, AWB, WDR
EN SA11XT48		480	3.6/4/6 /8/16 add 6\$	Sony		opt	0.3 Lux	12V	mirror function, motion detect, privacy zone, anti-flicke
EN SA11XT70		700	3.6/4/6 /8/16 add 6\$	Sony		opt	0.01 Lux	12V	mirror function, motion detect, privacy zone, anti-flicke
EN SA11XT60-WDR		600/HD	3.6/4/6 /8/16 add 6\$	Sony		opt	0.003 LUX	12V	SLC, 8X WDR/BLC/ECLPS, 3D-DNR, Wide Dynamic Range
EN EFC001		420	eye fish	Sony	No	No	0.1	12V	EYE FISH 180DEGREE
EN CD10RT85-C		850	3.6	SHARP	Yes	No	0 (B/W) 0.1 Lux Color	12V	ICR
EN SM35XT42		420	3.6	Sony	No	Yes	0.1	12V	PINHOLE LENSE WIDE ANGLE
EN SD11RT55-IS		550	6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC, ANR ELECTRONIC SHUTTER
EN SD30AT70		700	3.6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SD56RT42 / EN SD58RT42		420	4~9	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SD56RT70 / EN SD58RT70		700	4~9	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SD40RT42		420	3.6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	ICR
EN CD41RT70-C		700	3.6	Sharp	Yes	No	0	12V	ICR
EN SD23rt60		600	4	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SD23RT70		700	4	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC

Cameras

Surveillance
Systems
& Accessories

01

Item	Picture	TVL	Lens	Lens Brand	IR	Outdoor	Lux	Power	Intelligence video
EN DD61RC30-PT-W		CMOS	6mm	Aptina	Yes	No	0.1	12v	PTZ/SD card/Alarm/ Mic/ audio out
EN DD61RC30-PT		CMOS	6mm	Aptina	Yes	No	0.1	12v	PTZ/SD card/Alarm/ Mic/ audio out
EN DD61RC30-PT-3G		CMOS	6mm	Aptina	Yes	No	0.1	12v	PTZ/SD card/Alarm/ Mic/ audio out
EN HD26XC72-P		1.3MP	6mm	IP Aptina	True color	Yes	0.1	12v	Dual encoding 1920x1080
EN HW19RC80		2MP	6mm	IP Aptina	Yes	Yes	0	POE	Progressive scan MD 3DDNR WDR
EN HW12RC80-sdi		2MP	3.6	Sony	Yes	Yes	0	12v	3DDNR/ MD / WDR/ PRIVACY MASK
EN HD58RC80-SDI		2MP	2.8~12	Sony	Yes	Yes	0	12v	3DDNR/ MD / WDR/ PRIVACY MASK
EN KD-SP84XQ10		500TVL	10X	Sony	No	Yes	0.1	12V	PTZ
EN SW 27rt70-wdr		700	9~22	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN CW19RT85-C		850	3.6	CMOS	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	ICR
EN CW57RQ70-C		700	4~9	CMOS	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	ICR
EN CW67RT85-C		850	2.8~12	CMOS	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	ICR Very Focal Lens
EN SW23RT70		700	4~9	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SW22RT70		700	4	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC
EN SW20RT60		600	3.6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	WDR AWB
EN SW36RT55-IS		550	6	Sony	Yes	Yes	0 (B/W) 0.1 Lux Color	12V	DWDR, MD, DNR, WDR, 3D-DNR, AWB, BLC, ANR ELECTRONIC SHUTTER

Cameras

Surveillance
Systems
& Accessories

Car Camera with LCD 4.3" & 7"



LCD with TV 7" AV in



LCD with TV 10" AV in



Door Camera With LCD 4.3"



Wireless camera Built-in transmitter + receiver (10 to 15 meters)





EN-7604C

4 Channel Video Inputs
& **4** Channel Audio Inputs.
D1 (4CIF) Realtime Recording.
TV, VGA , USB2.0



EN-7608C

8 Channel Video Inputs
& **8** Channel Audio Inputs.
D1 (4CIF) Realtime Recording.
TV, VGA , USB2.0



EN-7616C

16 Channel Video Inputs
& **4** Channel Audio Inputs.
D1(4CIF) Realtime Recording.
TV, VGA , USB2.0



EN-D0604C-AS

4 Channel Video Inputs
& **2** Channel Audio Inputs.
D1(4CIF) Realtime Recording.
TV, VGA , USB2.0 & 1 HDD



EN- D0708D-E

8 Channel Video Inputs
& **1** Channel Audio Inputs.
CIF Realtime Recording
Or D1(4CIF) Recording With 6/7fps.
HDMI TV, VGA , USB2.0



EN-D0716D-E

16 Channel Video Inputs
& **1** Channel Audio Inputs.
CIF Realtime Recording
Or D1(4CIF) Recording With 6/7fps.
HDMI TV, VGA, Spot , USB2.0 .
Main & Spot Output.



EN- D1604D

Full D1 HDMI DVR
4 Channel Video
4 Channel Audio, Network
Alarm, Remote Control
VGA Network, Spot, TV.



EN-D1608D

Full D1 HDMI 1080P DVR
8 Channel Video & Audio
Network, Alarm
Remote Control
VGA Network, Spot, TV.




EN-D1614D-HF

Full D1 HDMI 1080P DVR
16 Channel Video
4 Channel Audio, Network
Alarm, Remote Control
VGA Network, Spot, TV.



EN-5332

32 Channel Video, **8** Channel Audio
DVD Optional, HDMI,VGA
Real Time Monitoring
Up to 4 HDD Up To 8 TB
Remote Control

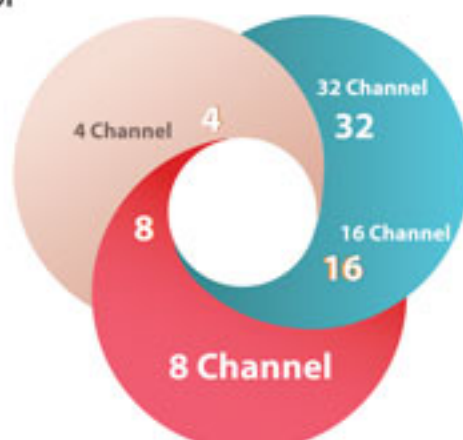

Cameras - Accessories

Surveillance
Systems
& Accessories

EN 596M

LCD 19" DVR COMBO 16 Channel 400 FPS



EN LR CCTV MTR 7

CCTV Monitor 7" - Two AV Inputs



EN LR CCTV TEST 4.3

CCTV Camera Test 3.5"
PTZ Control, DC Out
UTP Test, Video Generator
With Bag



EN LR CCTV TEST 3.5

CCTV Camera Test 3.5"
PTZ Control, DC out
UTP Test, Audio, Video Generator
With Bag



EN-C701A

Housing For Box Camera



EN BNC L CNTR



EN -DT23M-C

Plastic BNC
Male or Female Per Piece



EN LR BALUN 200

UTP Video & Power
Balun 1 Channel 200M



EN LR PWR 5A/10A/15A/20A

CCTV Power Supply 12V
5A/10A/15A/20A



EN-PD3008

PoE Splitter & Injector
Transfer the digital signal
and power via UTP cable,
make cabling easier.
Transmission distance 30M



EN LR BALUN 500

UTP Video & Power
Balun 4 Channel 500M



EN LR BALUN 1000

UTP Video & Power
Balun 4 Channel 1000M



EN-DC12S010

Power Adaptor 1000mA



EN-DC12J05009

Boxed Power Supply 5A With 9 ways

EN-DC12J10009

Boxed Power Supply 10A with 9 ways

EN-DC12J20018

Boxed Power Supply 20A with 18 ways



EN BNC RCA CNTR

BNC RCA Connector
From DVR To TV



EN BNCT CNTR

BNCT CONNECTOR



EN BT26F

BNC NUT Connector



EN BM25M-F

BNC CCTV Connector
(Need NUT)



EN BRKT 07B

CCTV Bracket 07B



EN LR DOME BRKT

Plastic Dome Bracket
For Small & Big Dome
Black/white



EN C2 BRKT

Metalic Bracket
20CM Black / White



EN C6 BRKT

Heavy Metalic Bracket
30CM Ivory

EN BRKT 1.2M

Metalic Silver
Long Bracket 1.2Meter

EN BRKT 30CM

Metalic Bracket 30CM
For Heavy Cameras





High-Definition
COLOR LCD Display
(3 Inch TFT)
Backup Battery



Door Access Control
. With Exit Button
. Intelligent Reader:
Card, Keypad or Biometric



High Speed Barriers

With Remote Control

Available:

3Meters-5Meters -6 Meters



For Parkings, Buildings, Hospitals, Gardens, & Others




Secure Your Home & Office

Wireless Complete Alarm Kit

Land Line Communicator
Include 2x Remote Control
Motion Sensor
LCD Panel
Siren
Wireless Door Sensor
Backup Battery

Office Alarm Systems

With Capacity For
More Than 200 Sensors

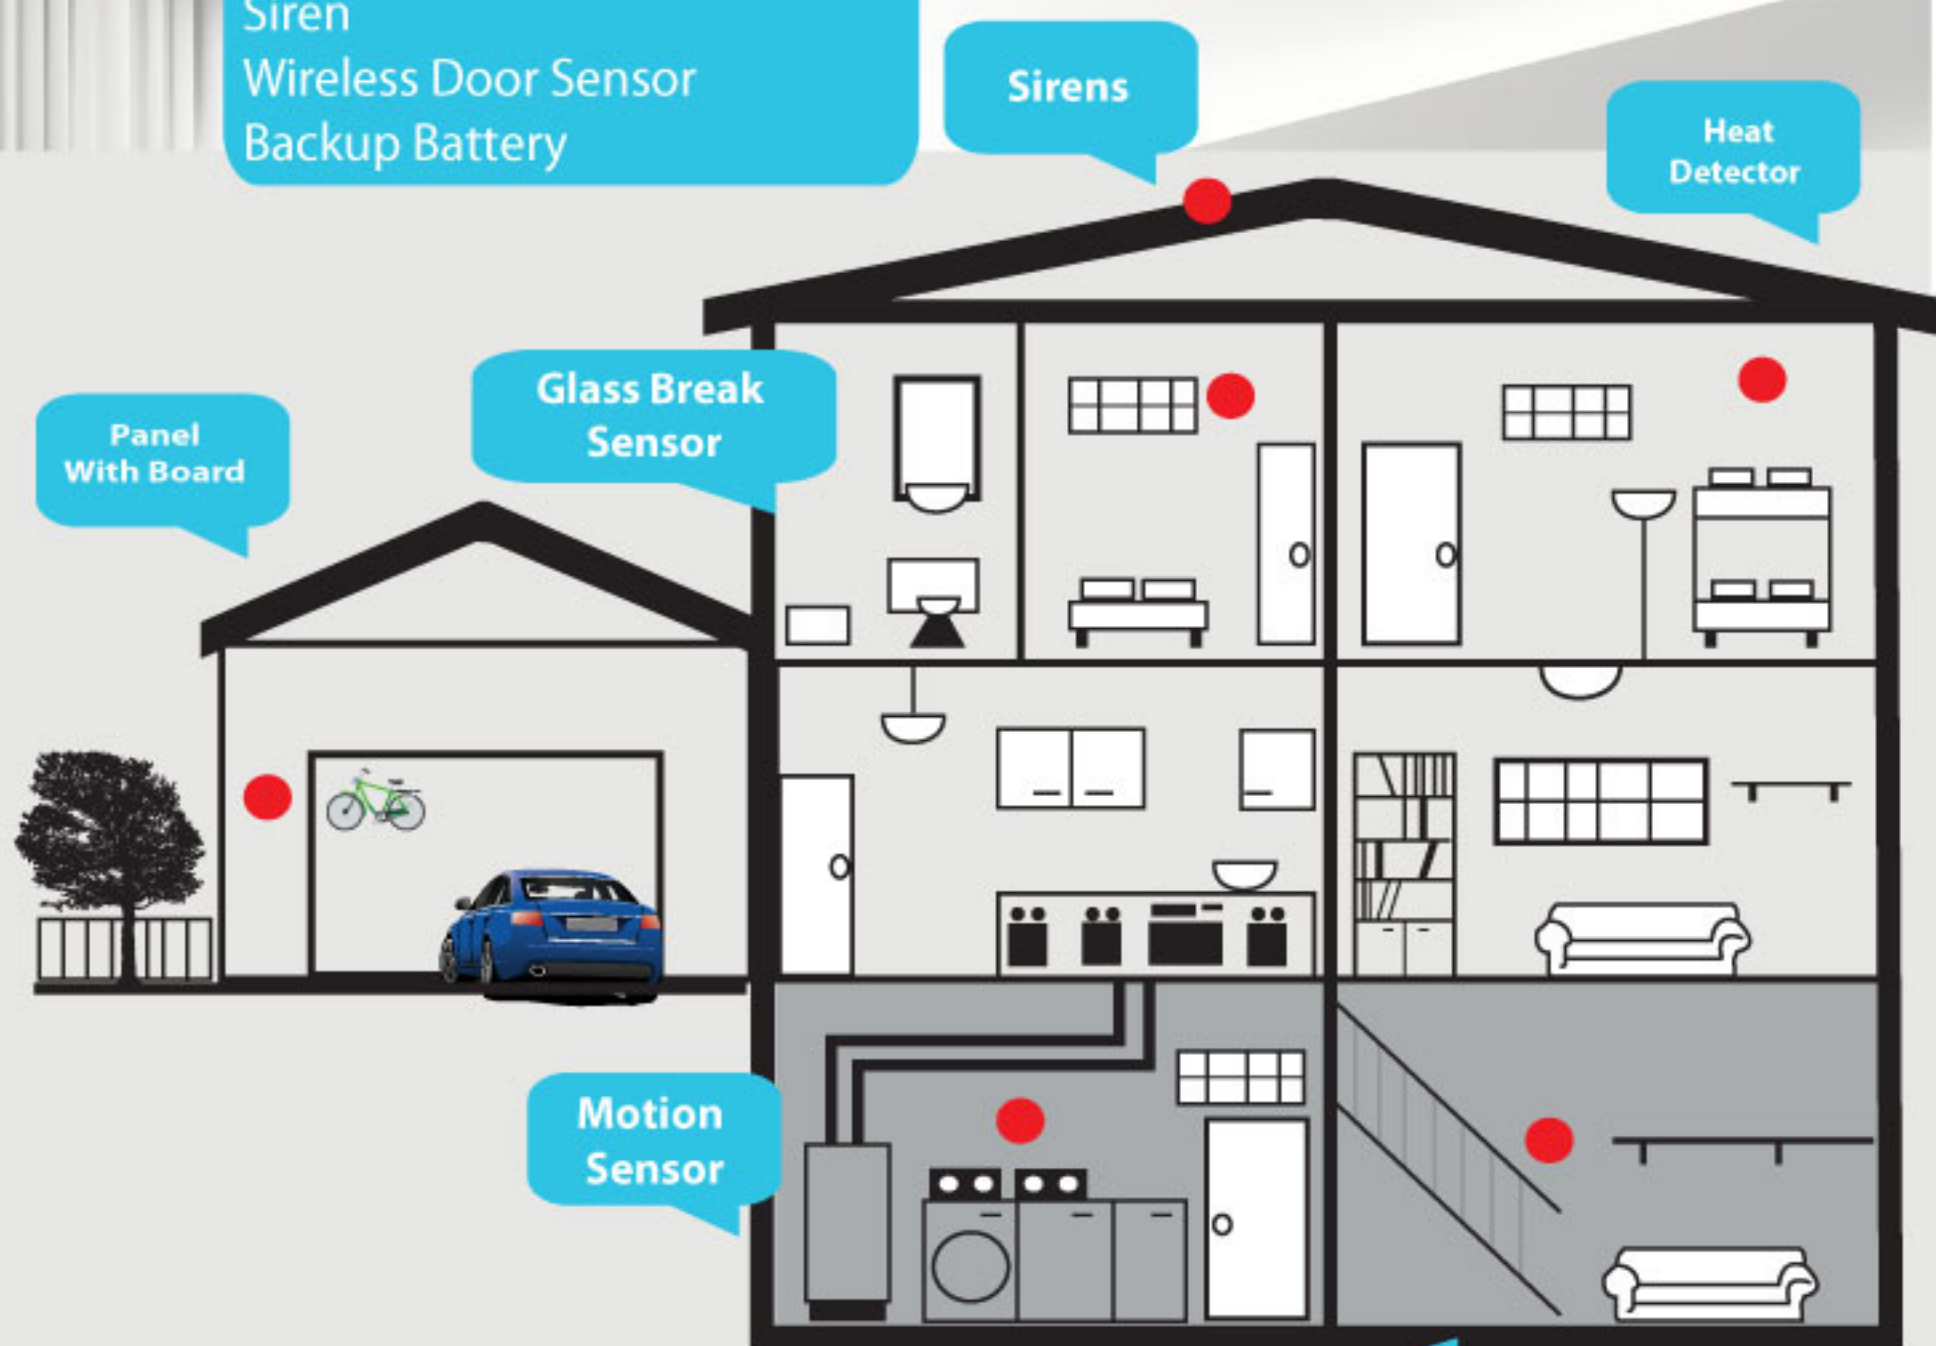

LED Board

LED Boards & Display,
RGB, & Full Colors
Write Boards
And Much More




LED display 20*100 cm indoor & outdoor

► RGB Color - Use the P10

LED display 36*228 cm indoor

► RGB 7 Colors - Use the P10

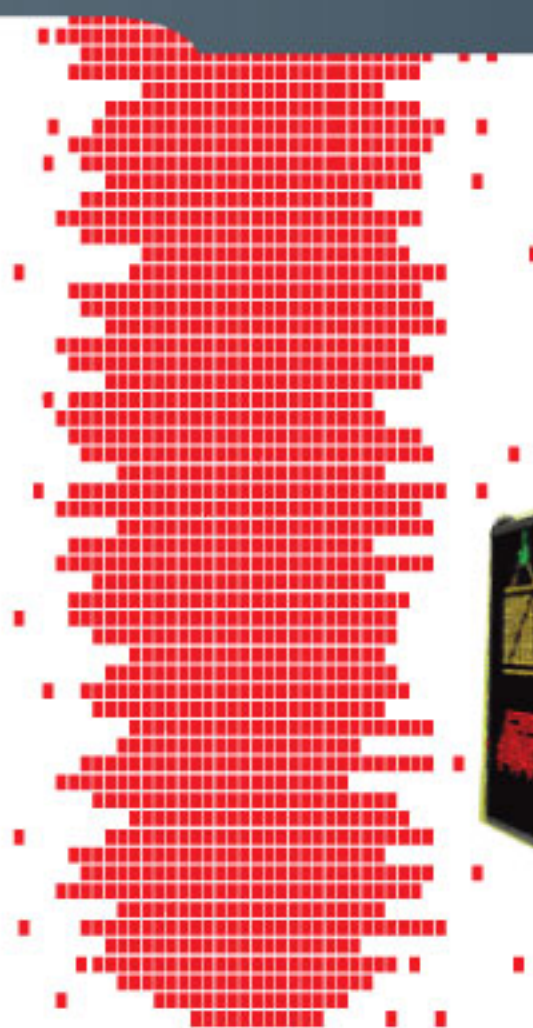

09

LED display 20*100 cm indoor & outdoor

► RED Color

LED display 80*40 cm indoor

► RED Color - Use P6 - High Res

LED display 80*64 cm indoor

► RED Color - Use P4 - High Res

LED Rainbow Board 40*50 cm

LED Rainbow Board 60*80 cm



Write LED Board

► Write With A LED Board Pen
Choose Any Color
Choose The Lighting Effect

◄ Pens Available

Solar System

Systems, Palette
Power Chargers
Power Bank & Others



EN-TYP200

Solar Panel
30V/200, 6.67Amp



EN-TY-082A

Solar System
Daily Power 3000W
Solar 500W Included
Inverter 1500W Included
Batteries Included 400 AH

EN-TY-081B

Daily Power 2000W
Solar 400W Included
Inverter 600W Included
Batteries Included 200 AH



EN-TY-05A

Solar Bag
Daily Power 120W
Solar 20W Included
Charging All Smartphones & Tablets
Inverter 300W (Fixed Wave) Included
Batteries Included 12 AH



Solar Bag EN-TY-05B

Solar Bag
Daily Power 240W
Solar 40W Included
Charging All Smartphones & Tablets
Inverter 300W (Sine Wave) Included
Batteries Included 12 AH



Solar EN-TY-050C

Mobile Solar Kit
Daily Power 25W
Solar 4W Included
2 LED Lamps
Charging All Smartphones & Tablets
Batteries Included 3 AH



EN-TY050A

Daily Power 90W
With Remote Control
2 LED Lamps
Charging All Smartphones & Tablets
Solar 15W Included
Batteries Included 7 AH

EN-TY055D

Daily Power 600W
With Remote Control
Charging All Smartphones & Tablets
Solar 100W Included
Batteries Included 65 AH



EN-4000T

Power Bank With Solar
Batteries Included 4000 mAh
1x Output 1*5V /1A
LED Battery indicator

EN-6000T

Power Bank With Solar
Batteries Included 6000 mAh
2x Output 1*5V /1A & 1*5V/2A
LED Battery indicator



EN Mega 10SH-AL

25W
Functions:
Talk, Siren, Record
Rechargeable



EN Mega 8SL

10W
Functions: Talk,
Siren, Record

EN-SM536

Wireless Microphones Receiver
With 2x Microphones



EN-SM508

Type: Dynamic
Direction: Cardiod-direction
Frequency response: 60Hz~14KHz
The output response: $600 \pm 30\%$
(at 1KHz)
Sensitivity: $-73\text{dB} \pm 3\text{dB}$

EN-AS105

Power 80W
Single Emission
Wireless Microphone
Audio Input: USB, SD, MMC
Built 5" Bass Treble
Rechargeable Battery
AC/DC
Weight 5 KG



EN-AS210

Power 250W
Dual Emission
Wireless Microphone
Audio Input: USB, SD, MMC
Digital Display
With Remote Control Function
Built 15" Bass Horn Tweeter
Rechargeable Battery
AC/DC



EN-AS1108

Power 120W
Single Emission
Wireless Microphone
Audio Input: USB, SD, MMC
Built 8" Bass
Rechargeable Battery
AC/DC



EN-AST61AV



Power: 100W
Single emission, Single receiver
Wireless microphone
Suitable for indoor and outdoor
Audio input : USB, SD, MMC
Built-in bass 6.5 inch X1; Dome
Built-in rechargeable storage: 5AhX1
Built-in charging protection function
AC / DC
Weight: 7 kg

EN-AS601



Frequency response: 66Hz-20kHz
Power: 60W
Impedance: 8 ohms
Sensitivity: 93dB

EN-DIHO 505



Frequency response:
66Hz-20kHz
Power: 50W
Impedance: 8 ohms
Sensitivity: 92dB

EN-DIHO CA 4




8Ω Stereo Power 330Wx2
4Ω Stereo Power 500Wx2
8Ω Bridge Power 990W
Frequency response 20Hz-20KHz+0/-0.5dB
THD+N <0.05%@8Ω 1KHz
S/N rate >105dB
Slew rate 40V/μs
Damping factor >600@8Ω
Crosstalk >100dB@8Ω 1KHz
Input impedance 20KΩ (balance)/10KΩ (unbalance)
Input sensitivity 0.775 V 1.0V 1.44V
Protect DC, short circuit, over heat, softstart,
Control Front panel: power stitch/CH1 CH2
Volume Rear Panel: Mode/low pass/grounding
Height 2U

EN-AR 380



Category: Phi 14 back electrode capacitance,
pointing to the characteristic: super cardioid,
sensitivity (1V to 1Pa): (-30 ± 1) dB,
frequency response: (20-13500) Hz,
output impedance (± 20%): 2K Ω (unbalanced),
Power supply: 2 battery 5,
Random accessories: wind cover 1,
non balance professional audio line 1,
Phi 4.5 6m6.3 plug, three core card faucet,
best pickup distance: 20-60cm



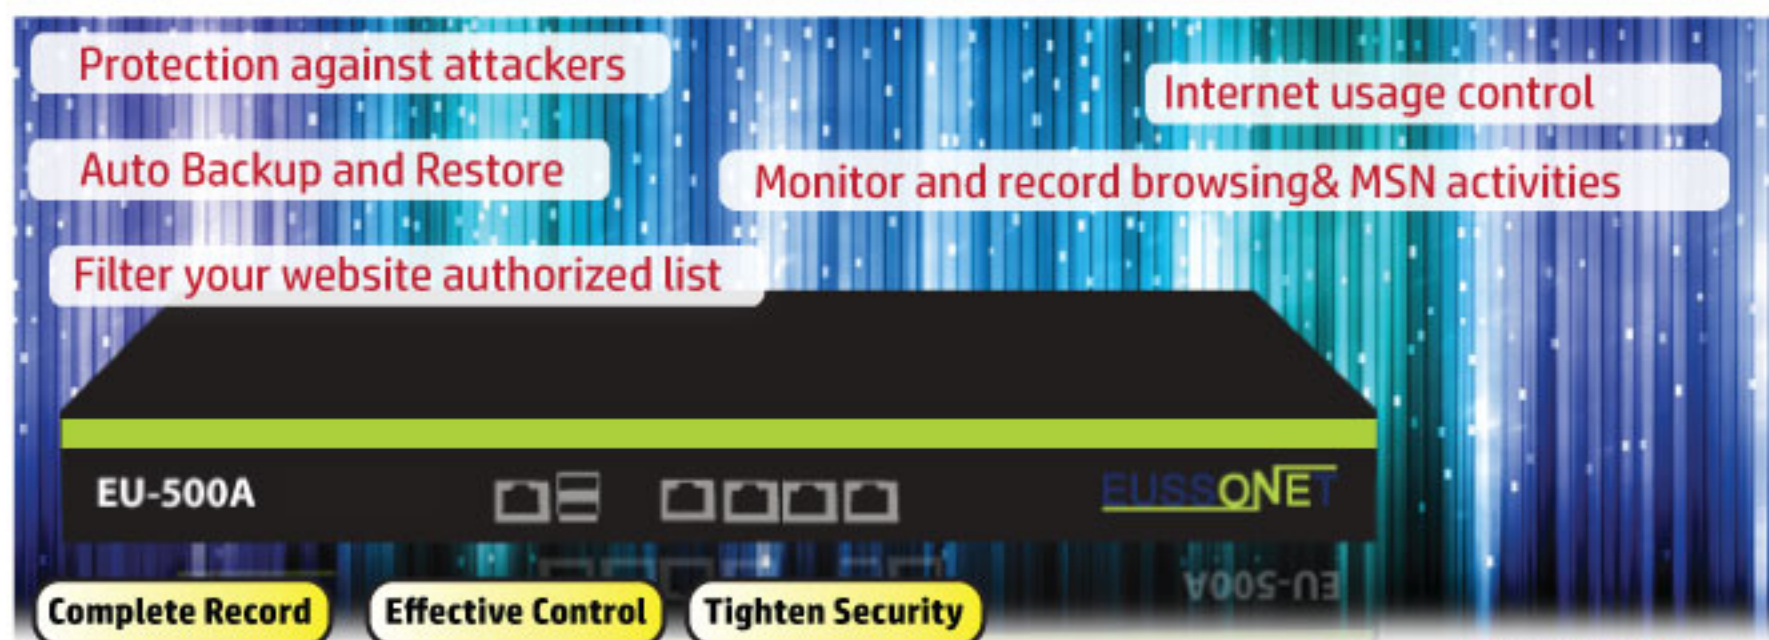

Keep an Eye on internet usage



Specifications

These equipments of Eussonet are the only systems that can detect and eliminate viruses, worms, and other content-based threats without reducing network performance.

Performance

Throughput (NAT,Bidirection,Mbps)		410
VPN	3DES (Bidirection, Mbps)	90
	AES (Bidirection, Mbps)	100
HTTP Troughput		43Mbps
FTP Troughput		42Mbps

Spam Protection

- It employs Fingerprinting, Bayesian Filtering, network rating, multi-dimensional graphics pattern recognition.
- Bayesian filtering, auto learning, Spam characteristics filtering to serve as the defense line against spam.

Intrusion Detection and Prevention (IDP)

- Built-in IDP (IDS + IPS) can inspect the packets from OSI layer 4 (transport layer) to OSI layer 7 (application layer) by using Deep Packet Inspection (DPI), and block concealed malicious code, such as worms and buffer overflow attacks.
- Can filter out all the packets that originate from the sessions of P2P, IM, NetBIOS, etc.
- As soon as an attack is suspected, UR-500A will immediately notify the IT administrator. Moreover, an extensive range of reports is available for the IT administrator to analyze. Integrated IDP system with automatic attack-signature database updates acpability

QoS

- Intelligent bandwidth management and QoS ensures the availability of critical applications.
- Controls the rate of data streams and allocates bandwidth based on policy and priorities , manages the use of P2P applications which can consume important bandwidth,and ensures bandwidth for mission-critical applications and important users.
- Committed and burst bandwidth by hierarchy, departments , groups & users.

Content Filtering

- URL Filtering for HTTP & HTTPS protocols By Categories
- Blocks access to restricted websites
- Hierarchy , department , group , user-based filtering policies

VPN

- UR-500A also provides IPSec VPN / PPTP Server and Client function, allowing companies to set up point to site or site to site VPN connections whenever necessary. This allows mobile employees or branch offices secured access to important backend resources.
- All tunnel can be control by access rule.
- Web VPN (or SSL VPN) offers you an easy VPN access to your headquarters simply through a web browser. Offsite users may create VPN connections at anytime from anywhere with ease.

Firewall Security

- Prevents attacks such as DoS, DDoS, UDP and ICMP flooding etc...
- ASIC-based NAT with Wire speed .

Virus Protection

- UR-500A offers you ClamAV for virus scanning. It can detect over 600,000 kinds of viruses, worms, and Trojans. Virus definitions are updated automatically once they are available.
- Multi-vector threat protection: SMTP and POP3

Content Records(HTTP,FTP,IM)

- Record of the staff visit the website of the integrity of the process of rapid statistics for each employee view of the frequency of Web site. Immediately understand the Internet habits of employees.
- UR-500A can monitor HTTP,FTP,IM(MSN,Yahoo,ICQ,ICR,Google.) It records browsed websites' contents(With HTTP) and attachments, files transferred by FTP, IM chatting contents.

Software Blocking

- Internet-enabled applications are not only difficult to regulate, but often a way for someone to compromise your information assets or network security. The users' access to various Internet-enabled applications can now be regulated through using UR-500A
- The UR-500A is the product to provide everything an organization needs to control and manage internal (P2P,Web Mail,Online Gaming,VPN Tunneling..) and external instant messaging (IM) traffic.
- It can easily and completely identify and manage both internal and public IM/P2P traffic within your organization.

Authentication

- Support users using either internal or external (Local / POP3 / AD) authentication.
- After recognizing user's ID effective authorization, users can be permitted its network using.

Car Camera DVR

Flexible Mounting Bracket

EN-VSC-CD25

Car Camcorder
LCD 1.5" 5 MP CMOS

EUSSENET

EN-VSC-CD16

Car Camcorder
LCD 2.4" 2MP

With Remote Control

EN-VSC-CD210

Car Camcorder
LCD 2" 3 MP
2 Way Camera

GPS Tracking

- .The emergency recording file is saved .
- .The Camcorder captures the details of events
- .The Camera records Audio & video in full 1080p high definition so you capture key moments in crisp, clear detail.
- .Loop recording
- .G-Sensor built-in
- .Camera 120 degree
- .Memory card support
- .Automatically power on/off
- support auto ignition boot
- .Infrared Night Vision
- .Internal Battery

Track your delivery drivers by checking their records and the history of their routes, clients visits, and stop points.



Networking Tool Kit

EN - HM-TK568RT

Hand Tools, Combination, crimping tool stripper Cutter Blade



EN-HM-TKB01

Hand Tools, Combination, Screwdrivers, Crimping Tool Cutter Stripper two screwdrivers , one tester



EN-HM-TK4015

Crimper, Cutter, Stripper, PD Tool, Blade, Coax. Stripper, DIE Set, Tester, Screwdriver



EN-HM-TK315

Heavy Duty Crimping Tool
Cable - Stripping Tool, Punching Tool
Cable Tester, RJ 11 & 45 UTP Connectors
Carrying Case



EN-HM-TK8500

Heavy Duty Crimping Tool
Cable - Stripping Tool, Punching Tool
Cable Tester, RJ-45 UTP Connectors
Carrying Case



Video Intercom

Color Video Doorphone System 7"

Indoor Unit

- . 7" TFT LCD
- . Resolution: 1440x234
- . 5 Ringtones



Outdoor Unit

- 380 TVL
- Color Camera
- F2.8 Lens
- 78 degree
- 0.5 LUX



Color Video Doorphone System 4"

Indoor Unit

- . 4" LCD
- . Resolution: 480x234L
- . 5 Ringtones



Outdoor Unit

- 380 TVL
- Color Camera
- F6.0 Lens
- 58 degree
- 1.5 LUX



Wire Tracker & Crimping Tools

Wire Tracker EN-XQ-350

Functions:

Trace telephone wire/LAN cable, Trace wire in electrical system, Verify LAN cable condition, Continuity test, Low battery indication, Bright white LED flash light, Cable Assignment Test, Cable State Testing



Wire tracker EN-NF-801R

Functions:

RJ11 & RJ45 Cable testing and wire sorting.
Earphone: Work in noisy environment.
Spotlight: Work at night or in the dark.



Wire tracker EN-NF-308

Functions:

Directly hunt 5E, 6E, telephone, coaxial, USB and other cables, Check wire errors. Length measurement: network cable, telephone cable. Automatically time-delay shut off & Backlight



EN-HM-TL568R

Dual -Modular Crimping Tool



EN- HM-TL022


The Crimping & Cable Testing Solution



EN-HM-TL2810R (cat6) Multi Modular Crimping Tool



Wheel Stopper

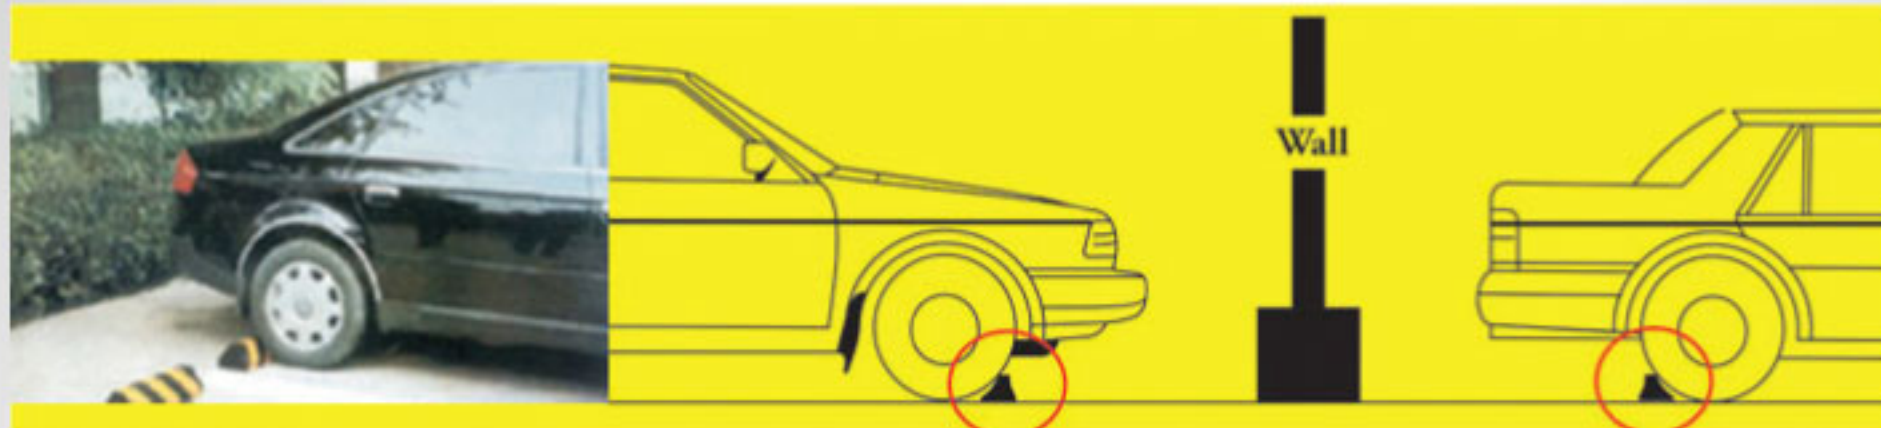

EN-CAS-DWQ-5

Rubber Wheel
Stopper
2000x160x100mm



EN-CAS-DWQ-9

Rubber Wheel Stopper
600x160x100mm



EN-CAS-DWQ-1

Rubber Wheel
Stopper
560x160x110mm



EN-CAS-DWQ-6
Grind Sand Wheel
Stopper
560x160x110mm



Parking Locks

EN-CAS-CWS-1

U-Type Manual Parking Lock
600x460x45xH420mm



EN-CAS-CWS-2

K-Type Manual Parking Lock
1000x200x80xH480mm



EN-CAS-CWS-8

Bollard Parking Lock
8.9 inch x H700mm



EN-CAS-CLS-8

Portable Wheel Lock
180-270mm



EN-CAS-CLS-5

2.0mm Wheel Lock
Diameter: 780mm



B Remote Control Parking Lock

430x320x105mm

Locking High: 430mm

Remote Distance $\leq 50m$

Up & Down: 5s -65

Environment Temperature: -30~+65

2mm Steel Rolling

Spraying Plastic Coating, Collision



Remote Rotation



Speed Bumps



EN-CAS-LG-1
Rubber Speed Hump
500x430x50mm

EN-CAS-LG-2
Rubber Speed Hump
250x350x50mm

End

End

Middle

EN-CAS-LG-6 PE
Speed Hump
500x300x30mm



ENCAS-LG-9
Rubber Rumble Strip



CAS-LG-3
Rubber speed Hump



Gates Motors

Swing Gate .. 2x Motors

1x Control Box

2x Remote Control

1x All Mounting Hardware




Slide Gate Motor With Control Unit Inside

2x Remote Controls

2x Keys

1x Alley Key

1x Limit Switch

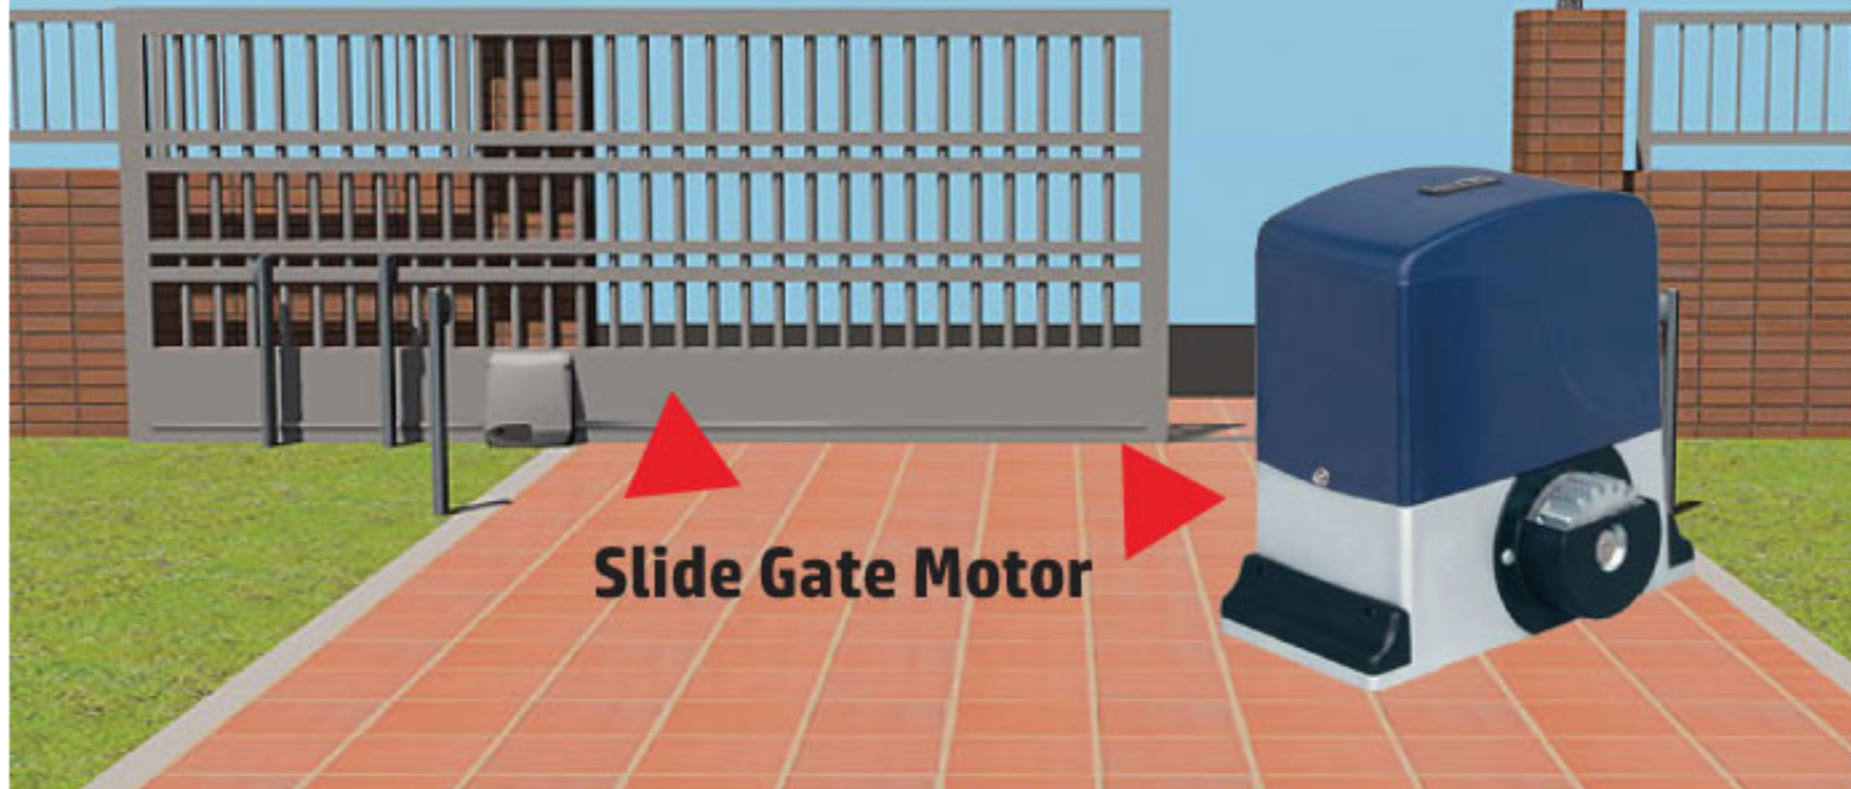

IP PTZ Camera

Access From Anywhere!



22

**EN-IR110 IP ptz camera with dyndns ,1Mpixel H.264 indoor
2 way audio, micro SD-Wired & Wireless - HD Resolution**

Specifications

- Support 1 Way H.264 & 1 way MJPEG video stream simultaneously. Adopt mega pixels CMOS sensor, support 720p (1280*720)/640*360/320*240 video resolution.
- Sensors: $\frac{1}{4}$ CMOS Sensor
- The Minimum illumination: 0.5lux@550mm
- Pan/Tilt Angle: Horizontal: 270 Degree & Vertical:120 Degree
- Infrared Light:11 IR LEDs, Night Visibility up to 10 meters
- Alarm Input: 1 Channel on/off input
- Alarm Output: 1 Channel 5V relay output

Features

- It adopts H.264&Mjpeg compression format.
- Simple & quick to setup, Friendly user interface.
- Day & night with 11 IR LEDs (night visibility up to 10 meters)
- Allow remote pan/Tilt control (Pan: 270 Degree & Tilt: 120Degree)
- Support IR & color filter change automatically, no any color difference.
- Allow remote viewing video & record from any internet connection.
- Wi-Fi compliant with IEE 802.11b/g/n
- Multi level users access and management with password protection load.
- Enable user monitoring by user' s Smartphones (Android/ Apple' s iphone).



Eussoguard Cameras

EUSSOGUARD EN 7480C
CCTV CMOS Camera
1/3" 500TVL 3.6mm



EUSSOGUARD EN 748T
CCTV CMOS Camera
1/3" 800TVL 3.6mm



EUSSOGUARD EN 610T
CCTV CMOS Camera
1/3" 800TVL 3.6mm



EUSSOGUARD EN 102L2
CCTV CMOS Camera
1/3" 1000TVL 3.6mm



23



EUSSOGUARD EN9240
CCTV CCD Camera
700TVL 4-9mm
IR 72 LED Sony lens

EUSSOGUARD EN 9250T-HD
CCTV CCD Camera 1/3"
Sony 1000TVL 2.8-12mm

EUSSOGUARD EN 9250T
CCTV CCD Camera 1/3"
Sony 700TVL 2.8-12mm

EUSSOGUARD EN 9250TP
CCTV CCD Camera
1/3" Sharp 420TVL 2.8-12mm

EUSSOGUARD EN 329T
CCTV CCD Dome Camera
700TVL 2.8-12mm



EUSSOGUARD EN 9136T
CCTV Sony Super HAD CCD Camera
700TVL 2.8-12mm



Multipurpose Accessories



EN-RX-849

Wireless Mouse 10m For DVR

EN-IR10

IR Link Photo Cell Eyes 25m



Video Signal Amplifier (500 m)

EN bracket 1.5

Bracket for CCTV 1 open
to 1.5 meters silver color



Infrared Projector

EN 15-1971

Video Transmitter Receiver
2W Room to Room

Audio / Video Sender

Sends sound and video, From DVR
system through walls, floors or ceilings
to a TV in another room.

Up to 100 feet away.

Uses 2.4 GHz signal and FM modulation
for superior performance



IP Cameras & NVR



25

Access From Anywhere ... One Device Can Do it ALL

1.3
MP



EN-HW19RC72-E

1.3 Mp - 1080P/720P- Lens 3.6mm

1.3
MP



EN-HD18RC72-EP

1.3 Mp - 1080P/720P - Lens 3.6mm

2.0
MP



EN-HW19RC80-E

2.0 Mp - 1080P/720P - Lens 3.6mm

3.0
MP



EN-HD18RC83-DE

3.0 Mp - 1080P/720P
Lens 3.6mm

3.0
MP



EN-HW67RC83-DE

3.0 Mp - 1080P/720P - Lens 2.8mm~12mm
Alarm, Audio, TF Card



With **NVR** : 4 Channels Up To **32** Channels



Cloud NVR (EN-z0804n) 4Channel

Cloud NVR (EN-z3808n-p) 8Channel (4 PoE)

Cloud NVR (EN-z3816n) 16Channel

Cloud NVR (EN-z3832n) 32Channel

Shredders

EN-FD506M

Shred Type: Cross Cut, Shredding Capacity: 6 Sheets
Shred Size: 5 x 34 mm, Shred Capability: paper, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 2.2 m/min
Continuously Working Time: 2 minutes, Motor Cool Down Time: 35 minutes
Noise Level: ≤ 70 dB (A), Waste Bin Capacity: 14 Liter
Switch Features 3 positions : Auto - Off - Reverse
LED Indications: Yes - Power on-green, overheat-red



26



EN-FHC512M

Shred Type: Cross Cut,, Shredding Capacity: 12 Sheets
Shred Size: 5 x 38 mm, Shred Capability: paper, CD, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 2.2 m/min
Shredding Speed - Max. Sheets: 2 m/min, Continuously Working Time: 2 minutes
Motor Cool Down Time: 35 minutes, Noise Level: ≤ 70 dB
Separate CD Slot: Yes, Waste Bin Capacity: 19 Liter
Switch Features: 3 positions select switch: Auto - Off - Reverse
LED Indications: Yes (Power on, overheat)

EN-FP510D

Shred Type: Cross Cut, Shredding Capacity: 10 Sheets
Shred Size: 5 x 34 mm, Shred Capability: paper, CD, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 1.8 m/min
Shredding Speed - Max. Sheets: 1.8 m/min, Continuously Working Time: 5 minutes
Motor Cool Down Time: 45 minutes, Noise Level: ≤ 58 dB
Separate CD Slot: Yes, Waste Bin Capacity: 21 Liter
Switch Features 3 positions select switch: Auto - Off - Reverse
Overload Protection: Yes, LED Indications: Yes (Power on, overload)



Shredders

EN-PM310D

Shred Type: Micro Cut, Shredding Capacity: 10 Sheets
Shred Size: 3 x 9 mm, Shred Capability: paper, CD, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 2 m/min
Shredding Speed - Max. Sheets: 1.8 m/min, Continuously Working Time: 7 minutes
Motor Cool Down Time: 45 minutes, Noise Level: ≤ 58 dB
Separate CD Slot: Yes, Waste Bin Capacity: 20 Liter
Switch Features 3 positions select switch: Auto - Off - Reverse
Overload Protection: Yes, LED Indications: Yes (Power on, overheat, overload)
Energy Saving (Auto Shut Off): Yes, Casters Yes



27

EN-PSC310D

Shred Type: Micro Cut, Shredding Capacity: 10 Sheets
Shred Size: 3 x 9 mm, Shred Capability: paper, CD, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 2 m/min
Shredding Speed - Max. Sheets: 1.8 m/min
Continuously Working Time: 7 minutes
Motor Cool Down Time: 45 minutes
Noise Level: ≤ 58 dB, Separate CD Slot: Yes
Waste Bin Capacity: 28 Liter, Switch Features: Button switch, On/Off, Fwd, Rev
Overload Protection: Yes, LED Indications: Yes (Power on, overload, overheat, binfull)
Energy Saving: (Auto Shut Off) Yes
Casters: Yes



EN-PSC418D

Shred Type: Cross Cut, Shredding Capacity: 18 Sheets
Shred Size: 4 x 38 mm, Shred Capability: paper, CD, credit card, standard staples
Throat Width: 225 mm, Shredding Speed - Single Sheet: 2 m/min
Shredding Speed - Max. Sheets: 1.8 m/min, Continuously Working Time: 7 minutes
Motor Cool Down Time: 45 minutes, Noise Level: ≤ 58 dB
Separate CD Slot: Yes, Waste Bin Capacity: 28 Liter
Switch Features: Button switch, On/Off, Fwd, Rev
Overload Protection: Yes, LED Indications: Yes (Power on, overload, overheat, binfull)
Energy Saving (Auto Shut Off): Yes, Casters: Yes



Vacuum Money Counter

EUS-100

Dual-Display Heavy Duty Banknote Counting Machine

Features

- Good looking from outside to inside, all parts were made carefully with good quality
- To adopt the working principle of attracting notes by vacuum pump
- Large-screen LED display(option)
- High quality motor and vacuum pump are used to lower the noise and make a quiet working environment
- " ADD, CHECK, BATCH, COUNT " counting pattern
- Flawless clearing up system can ensure working condition
- All parts were modular designed, much easier to maintain, and less trouble
- Every single machine need to run spindle head for at least 48 hours, and whole machine for at least 24 hours before shipping, to ensure the quality
- High flexibility to fit demand from different regions and banks
- CPU control circuit to get highly reliability
- Remote Display
- High counting speed up to 1,800 notes per minute
- High quality, customer oriented and economical counters with excellent performance

Specifications

- Feed System: Vacuum
- Counting Speed: 4 sec. per 100 notes
- Counting Display: 5 Digit (LED type)
- Batch Display: 3 Digit (LED type)
- Capacity: 200 notes (Bound or unbound)
- Power: 110V/60Hz ~220V/50Hz
- Note Sizes: 45mm x 100mm ~130mm x 240mm
- Dimensions: 270*400*265(mm)
- Weight: 23kg



Vacuum Money Counter

EUS-116

Heavy Duty Banknote Counting Machine

Features

- Good looking from outside to inside, all parts were made carefully with good quality
- To adopt the working principle of attracting notes by vacuum pump
- Large-screen LED display(option)
- High quality motor and vacuum pump are used to lower the noise and make a quiet working environment
- "ADD, CHECK, BATCH, COUNT" counting pattern
- Flawless clearing up system can ensure working condition
- All parts were modular designed, much easier to maintain, and less trouble
- Every single machine need to run spindle head for at least 48 hours, and whole machine for at least 24 hours before shipping, to ensure the quality
- High flexibility to fit demand from different regions and banks
- CPU control circuit to get highly reliability
- Remote Display
- High counting speed up to 1,800 notes per minute
- High quality, customer oriented and economical counters with excellent performance

Specifications

- Feed System: Vacuum
- Counting Speed: 100pcs/4 seconds, 100pcs/3.5seconds, 100pcs/3seconds, 100pcs/2.8seconds
- Counting Display: 5 Digit (LED type)
- Batch Display: 3 Digit (LED type)
- Capacity: 200 notes (Bound or unbound)
- Power: 110V/60Hz ~220V/50Hz
- Note Sizes: 45mm x 100mm ~130mm x 240mm
- Dimensions: 270*300*790(mm)
- Weight: 35kg



Download From Here

